

# Appliance Tap

Tool-free isolation valve for appliances

## Overview

Speedfit push-fit valve allows isolation of appliances such as a washing machines or dishwashers for maintenance or installation. Simply push the valve fully onto the pipe and thread the appliance hose onto the valve. To demount the push-fit end, pull the collet towards the body of the fitting and pull the pipe to release.

The fitting is quicker and easier to install in confined spaces than traditional methods as it eliminates the need for hot works or tools.

Designed, manufactured and assembled in the UK.

## Features & Benefits

- Quickly connects an appliance to the water supply
- Integrated 1/4 turn shut off valve
- Install and demount in seconds without tools
- Safe flame-free installation, with no hot works, glue or flux
- Grip & Seal collet with stainless steel teeth and main O-Ring seal
- Suitable for use with JG Speedfit PEX and polybutylene barrier pipe (inserts required) and copper pipe
- Suitable for cold and intermittent hot water applications



Product code	Description	Size	Bag QTY
15APT	Appliance Tap	15mm x 3/4" BSP	5


# Appliance Tap

## Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Intermittent Hot Water Use	65	65	6

Materials	
Body	Vurēgi kzgr&[ t lørkj /& næk
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Vurēgi kzgr&[ t lørkj /& næk / zgd rkyy& zkk
Yn{ z3Ull&r{ my	Kznērkt k&urēvuvērkt k& dt k& utus kx&KVJ S /
Gi z{ gzd n&d	Vurēgi kzgr&[ t lørkj /& næk
I ut zur& t uh	Vurēgi kzgr&[ t lørkj /& næk
Ngrl & g& x& nk	Vurēgi kzgr&[ t lørkj /& lrgi q& zgd rkyy& zkk
Y{ vvux& g ynkx	Vurēgi kzgr&[ t lørkj /& omz& l{ k
Caps	Vurēgi kzgr&[ t lørkj /& næk

## Dimensions – All measurements in mm unless otherwise stated

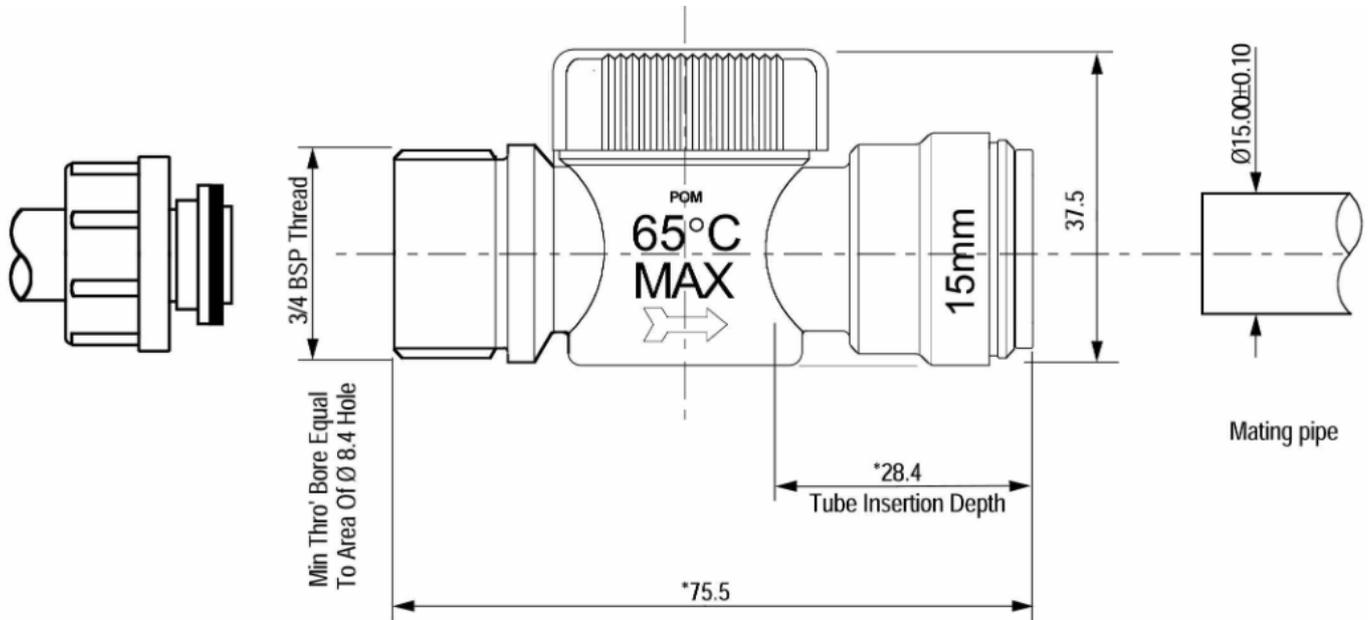

Note:- Dims indicated thus \* are with Collet in Release position